


Dustie™

Dustless Technologies®

Installation Instruction


FOR RIGHT ANGLE GRINDERS

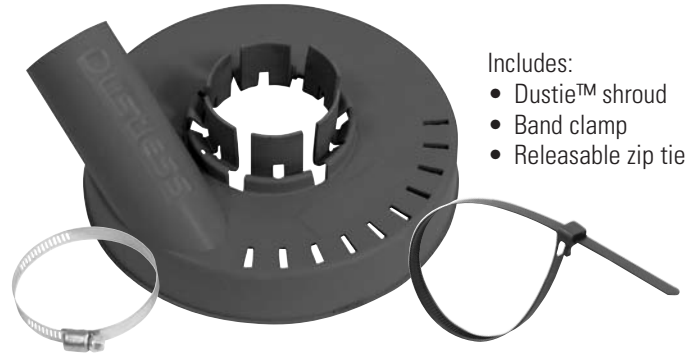

- Includes:
- Dustie™ shroud
 - Band clamp
 - Releasable zip tie




1. UN-PLUG GRINDER. Slip shroud on grinder, flanges should be flush with attachment.

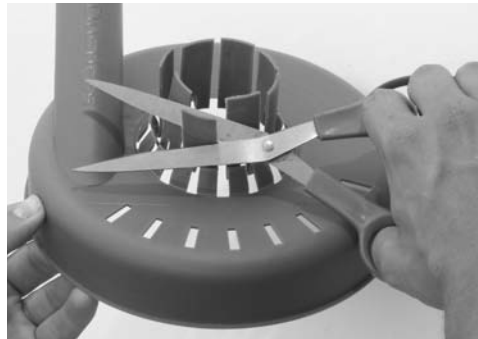

2. Cut flanges to adjust height of shroud. For best dust control, grinding wheel should be 1/4 inch below shroud.



3. Install grinding wheel. See #2 for height.

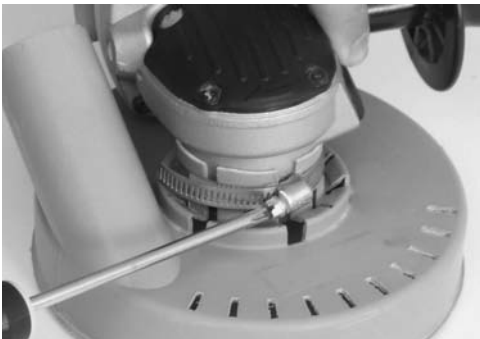

4. Tighten band clamp.



5. Install Grinding wheel. For best dust control, wheel should be 1/4 inch below shroud.



6. Insert hose to port.



7. Secure other end of hose to the electric cord with releasable tie provided.

Instructions for Crack Chasing/Tuckpointing Application

1. Trim Flanges to adjust cutting wheel in middle of shroud.
2. Cut the Dustie on "CC Line" or "TP Line" depending on your desired opening angle. Follow instructions 2-7 above.
3. Snap on Cover Plate* over open face.

*Not Included with all kits

This product was inspected and packaged carefully before being shipped from the factory. If you should happen to need assistance during assembly or operation, call 1-800-568-3949 for our customer service department.

WARNING

Always make sure grinder is UNPLUGGED when removing or attaching front noseclip. Before use, refer to your tool manual for warnings and instructions.

WARNING

If using this product in the removal of lead paint, a Dustless® HEPA vacuum must be used. The removal of old paint may generate dust or fumes that contain lead. Exposure to lead may cause brain damage or other adverse health effects, especially in young children and pregnant women. Follow all federal, state and local laws including the U.S. Environmental Protection Agency's Renovation, Repair and Painting law or similar state law.

Dustless®
TECHNOLOGIES

800.568.3949

dustlesstechnologies.com

Manual081508